

*let your door bring prestige
to your building*

*enjoy “automatic sliding door”
comfort in every moment of life.*

GOXU
— World Wide Open —

VIRA

time and energy saving



Motor Alternatives

- German Dunker Motor
- GOXU Motor



Carriage
Carriage with 3-wheels adjustable leaf height



Battery (Optional)
Battery system that ensures the operation of the door in case of black out



VIRA Control Unit
Control Unit with embedded LCD Monitor, programmable with or without function selector



Rubber Damping Profile
Prevents noise and vibration



Wireless Operation Mode Controller (Optional)

- Easy to use
- Uses wireless RF



Manual Programmer (Optional)



Rubber Hinge Profile

- Connects Track Support and Casing Profiles together
- Prevents noise, vibration and dust



Cover Holding Bar
Provides easy maintenance




*performance,
elegance and quality
all together*




KIT CONTENT FOR ONE-LEAF



VIRA

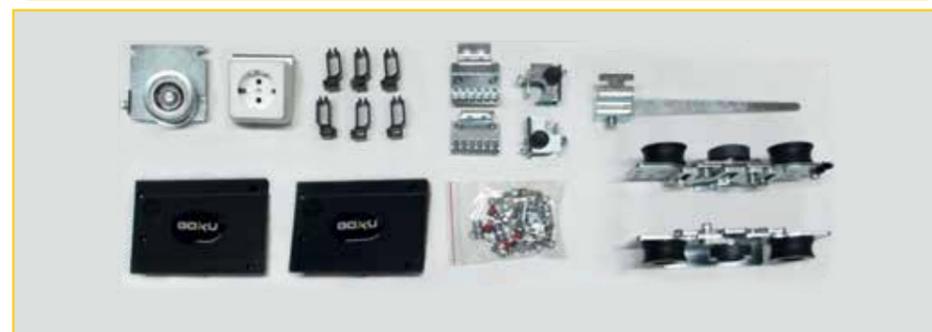

PROFILES FOR THE MECHANISM

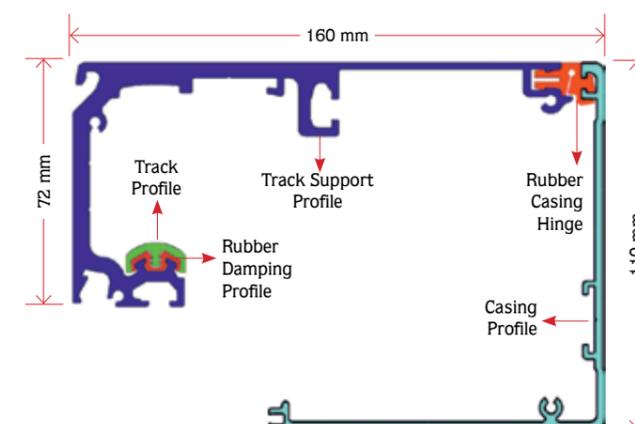

| TECHNICAL SPECIFICATIONS | VIRA T40 | VIRA T30 |
|-----------------------------|---|---|
| Operating Voltage | 165 Vac -240 Vac 50 Hz | 165 Vac -240 Vac 50 Hz |
| Power Consumption | 250 W 1,5 A | 250 W 1,5 A |
| Power Supply | SMPS 150W 27 Vdc | SMPS 150W 27 Vdc |
| Motor Brand | DUNKER | GOXU |
| Applied Voltage | 24 Vdc | 24 Vdc |
| Torque | 100 W | 100 W |
| Dimensions of the Mechanism | 72 x 160 x 110 mm | 72 x 160 x 110 mm |
| Opening Speed | 1 Leaf: 90 cm/sec, 2 Leaves: 180 cm/sec | 1 Leaf: 90 cm/sec, 2 Leaves: 180 cm/sec |
| Closing Speed | 70% of opening speed | 70% of opening speed |
| Maximum Door Weight | 1 Leaf: 130 kg 2 Leaves: 100 kg | 1 Leaf: 130 kg 2 Leaves: 100 kg |
| Height Adjustment | ±8 mm | ±8 mm |
| Run Time Ratio | % 100 | % 100 |
| Impact Detection | Encoder detection with microprocessor | Encoder detection with microprocessor |
| Remote Control | OPTIONAL | OPTIONAL |
| Protection Class | IP X0 | IP X0 |
| Limit Switch Control | Encoder | Encoder |
| Operating Temperature | 0 °C / 55 °C | 0 °C / 55 °C |
| Communication Protocol | RS485 | RS485 |


Kit Content For One-Leaf

- 1 pc. Installation Manual
- 1 pc. Dunker Brand Motor
- 1 pc. Control Unit with LCD Monitor, in plastic cover
- 1 pc. Antistatic carbon brush
- 1 set locking strap for electro-mechanical lock connection.
- 1 pc. Cover Holding Bar
- 1 pc. Cardboard Box and fasteners, plastic cable channels
- 1 pc. Switch-Mode Power Supply (SMPS) in plastic cover (for Vira Model)
- 1 set side cap
- 2 pcs. Roller carriages
- 1 pc. Power cable
- 1 pc. Power Socket
- 1 pc. Extension cable
- Reverse pulley
- 2 pcs. GOXU Blob Tag
- Belt Clamp


*design your own door
with wide number
of options*



APPLICATION ALTERNATIVES

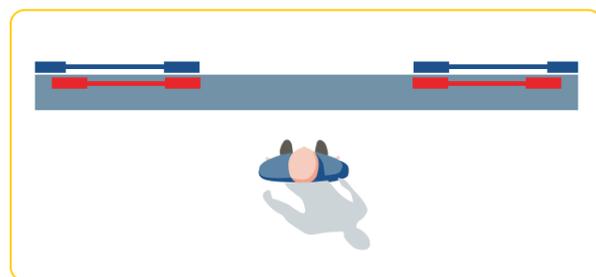

Two-leaves

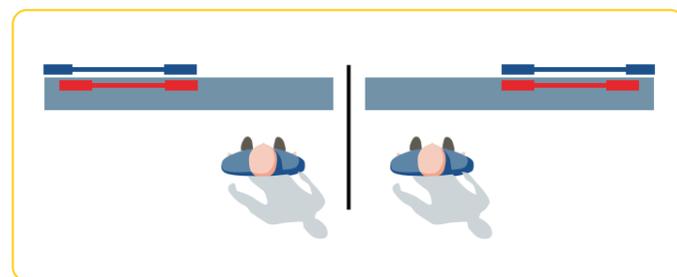

One-leaf

LEAF ALTERNATIVES



OUTLINE
(Wide Profile System)



NEWLINE
(Slim Profile System)



VIEWLINE
(Frameless System)

ACCESSORIES



Microwave Radar
(local)



3H-IR14 Activation
and Safety Sensor



HR50-BI
Microwave Radar



Vira Mechanical
Operation
Mode Controller



24 Vdc Battery Kit



Bb10 Beam
Photocell



Wireless Operation Mode Controller



Touchless,
Automatic Door
Activation Switch
(Surface Mounted)



Card-reader With
Keypad



Automatic Door
Activation Button



Face Recognition
Access Control
System



Fingerprint
Access Control
System

GOXU

— World Wide Open —

Experience,
Manufacturing,
Quality...

Made in

Türkiye



Continual Customer Satisfaction

Continual Quality



For information



www.goxu.com.tr

BRS036-EN_REV06