

business requires seriousness

each and every piece of your jobsite are like the links of a chain.

“sectional industrial doors”

should be one of the strong links of this chain.



GOXU
— World Wide Open —



*business requires
efficiency*

*various panel and door choices
for time and cost saving*



Optional Colours for White Panel



Acrylic painting
in any RAL color
(except fluorescent colors)
can be applied to its cost.

RAL 3020


RAL 1018

RAL 5005


RAL 7016

NOTE: No additional
painting cost occurs for
above 4 colours based
on ordering quantity and
delivery.


Steel Sheet Structure Of Panel





Panel Design



Finger
Protection,
Filled Panel



Non-Finger
Protection,
Filled Panel

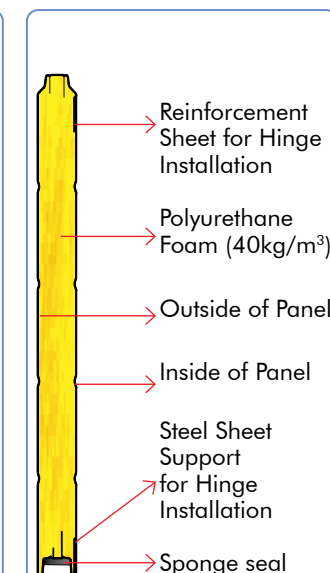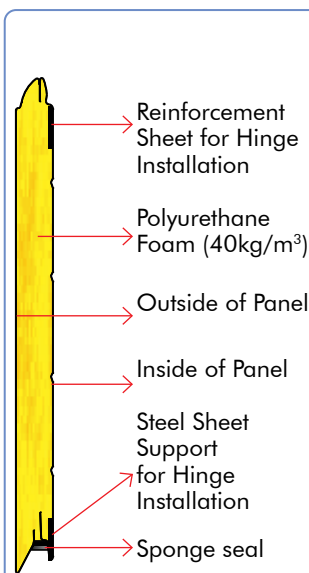

Panel Internal Side Options



Panel External Side Options

4010



Cassette, Wood
Embossed

RAL 9010

4011



Ribbed,
Wood Embossed

RAL 9002 RAL 9006 RAL 7016

4012



Smooth Surface
(no embossing)

RAL 9010

4013



Ribbed, Monowall,
Wood Embossed

RAL 9002 RAL 9006 RAL 7016

4015



Ribbed, Aluminum
Stucco Embossed

RAL 9010

4016



Wood looking,
Cassette, Wood
Embossed

Golden Oak (PMT25)

4017



Wood looking,
Ribbed,
Wood Embossed

Golden Oak (PMT25)

4018



Wood looking,
Central Single Ribbed,
Smooth Surface

Golden Oak (PMT25)


4023



Wood looking,
Central Single Grooved,
Smooth Surface

Golden Oak (PMT25)

4025



Microwave,
Stucco Embossed


RAL 9002 RAL 7016

*business needs
transparency*


*solutions for transparency,
sun light penetration and elegant outlook*





Panel Design



Finger Protection, Fullvision Panel




Non-Finger Protection, Fullvision Panel

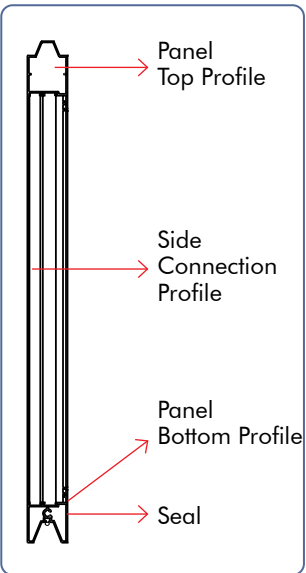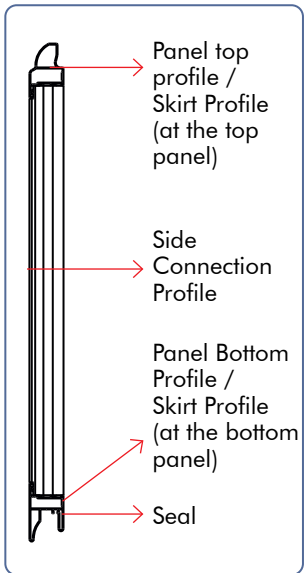


Door Facade Configuration Options



Insert Options

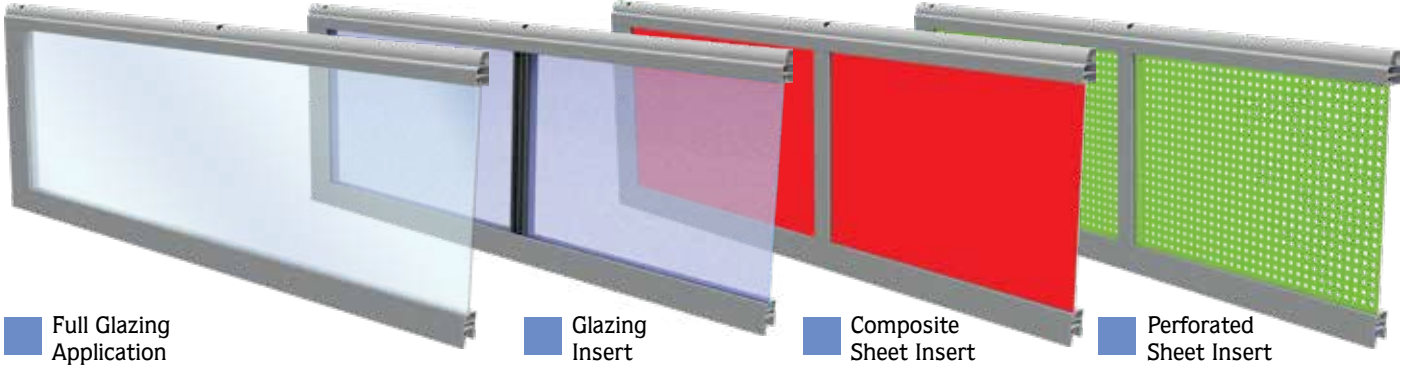

Panel Details/Options

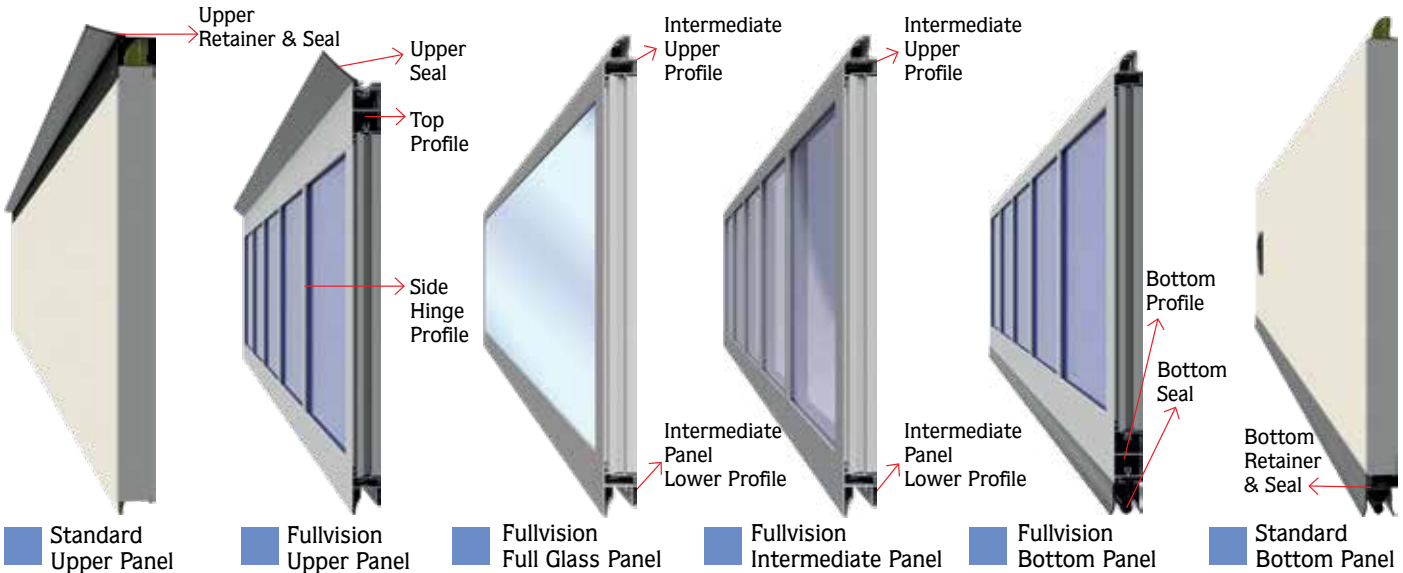

*business requires
technology...*

*high tech production process provides;
long life, safety and flexibility*



Door in door application
with standart threshold



Door in wall
application



Door at side
application



Low Threshold
application



Wicket Door Accessories

Panic Bar





Door Closer



Low Distance Handle



Standard and Low Threshold
Details

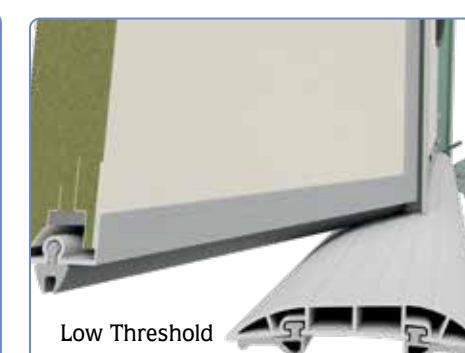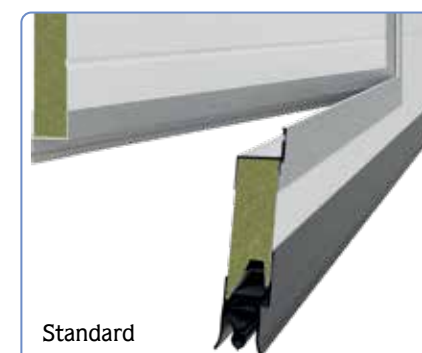

 *wicket door provides fast, easy passage and energy saving!*




*business requires
optimisation...*


*several design of windows provides you
to optimise nature light and weather resistance*



Ventilation Grills




Ventilation grill, white plastic, 338x132 mm, **closable type**



Ventilation grill, white plastic, 338x132 mm, **open type**

*various sizes
and designs of
windows provide
sun light and
thermal isolation
optimisation*


Windows

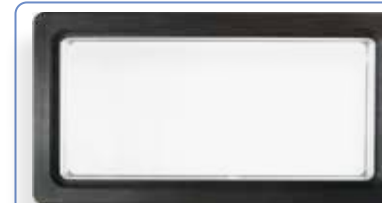

Black




- 345x670 cm
PMMA+PMMA
- With Clips

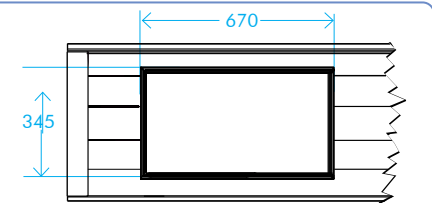

Black



- 345x670 cm
PMMA+PMMA
- With Clips
 - With Screws

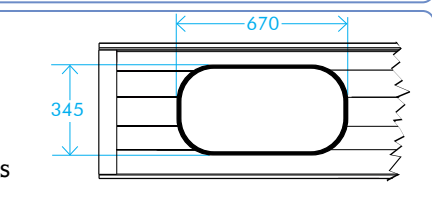


Black

White



- 336x640 cm
PMMA+PMMA
- With Clips
 - With Screws

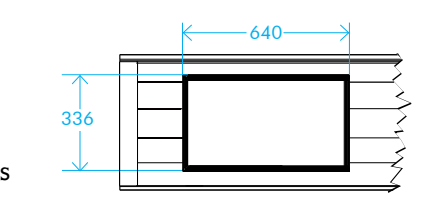


Black

White



- 336x640 cm or
430x770 cm
triple PMMA
- 60 or 80 mm
with screws

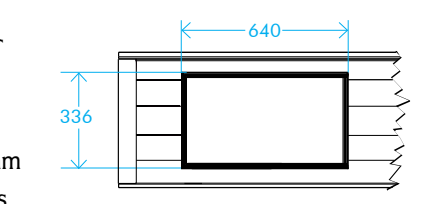


Black

White



- 203x610 cm
PMMA+PMMA
- With Screws

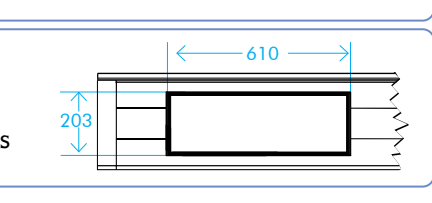

*business requires
strategy...*

*various options;
to control the transparency
to take the advantage of sun light*



GLAZING OPTIONS

ACRYLIC



PMMA UV



Material properties
Colourless, transparent, smooth, resistant to UV. Light transmittance 93%. Material is not resistant to scratches. More information available in PMMA Technical Sheet at Customer Zone.

Thickness of the sheets
2,5 mm, 3,0 mm
Category
Standard product

ACRYLIC



PMMA UV Milk



Material properties
Resistant to UV. Light transmittance 4 %

Thickness of the sheets
3,0 mm
Category
Non-standard product

ACRYLIC



PMMA UV Gray



Material properties
Resistant to UV. Light transmittance 51%

Thickness of the sheets
3,0 mm
Category
Non-standard product

ACRYLIC



PMMA UV Satin



Material properties
Resistant to UV. Light transmittance 78%.

Thickness of the sheets
3,0 mm
Category
Non-standard product

ACRYLIC



PMMA UV Soft Blue



Material properties
Resistant to UV. Light transmittance 88%

Thickness of the sheets
3,0 mm
Category
Non-standard product

ACRYLIC



PMMA UV Smoked



Material properties
Resistant to UV. Light transmittance 50%.

Thickness of the sheets
3,0 mm
Category
Non-standard product

ACRYLIC



PMMA UV Hard



Material properties
Colourless, transparent, smooth, scratch and UV resistant. Light transmittance 90%.

Thickness of the sheets
2,0 mm, 2,3 mm, 3,0 mm
Total thickness of the pane
15 - 31 mm

ACRYLIC



PMMA UV Bark



Material properties
Colourless, with a BARK surface structure which blurs the vision, UV resistant. Light transmittance 93%. Material is not resistant to scratches

Thickness of the sheets
4,0 mm
Category
Standard product

POLYCARBONATE



PC UV



Material properties
Colourless, transparent, smooth, resistant to UV. Light transmittance 86%. Material is resistant to scratches.

Thickness of the sheets
1,5 mm, 3,0 mm
Total thickness of the pane
15 - 32 mm

*business needs
focus on...*

*focusing on every item
ends up with an excellence
in the whole work*

Springs



Powder Coated Springs (Standard)

Spring Break Safety Devices



Noise reducing!
Spring straightening!

Spring Filler



SPRING CYCLE OPTIONS
Standard 20.000,
optional up to 100.000
operation cycle.




Long life duty cycle springs with Shot blast technology!
Non-rusting quality springs with powder coating process!


Door Handles and Locks



Flash Mounted Handle

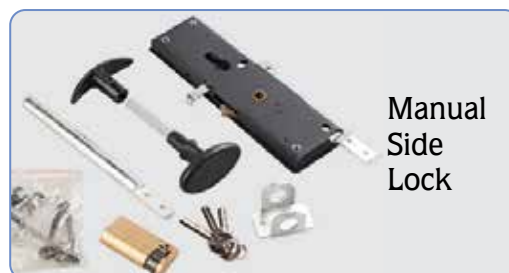

Manual Side Lock

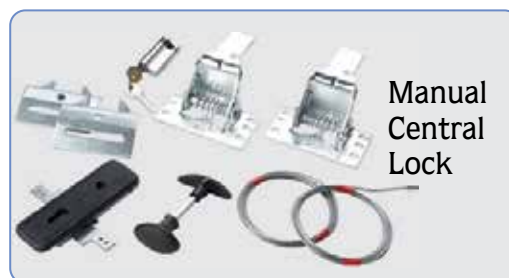

Manual Central Lock



Side Manual Sliding Lock

Sealing Solutions



Termoplastic Side seal (Black)

Bottom seal (EPDM-Black)



Bottom profile, Aluminium (Black)

Upper seal (EPDM-Black)



Top profiles, Aluminium (Black)

Hardware Options




Galvanized Hardware:
Standard for all model

Powder-Coated Hardware:
Optional for all model

Stainless Steel Hardware:
Optional for all model

Track Suspension Device (Optional)

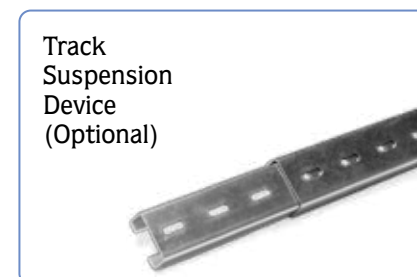

Safety Devices



Spring Break Device
Standard for HERO



Cable Break Device
(Optional)



Roller Protection
(Optional)




*business needs
solutions...*

*suitable solutions for all requirements
and various construction types*




Removable Intermediate Track

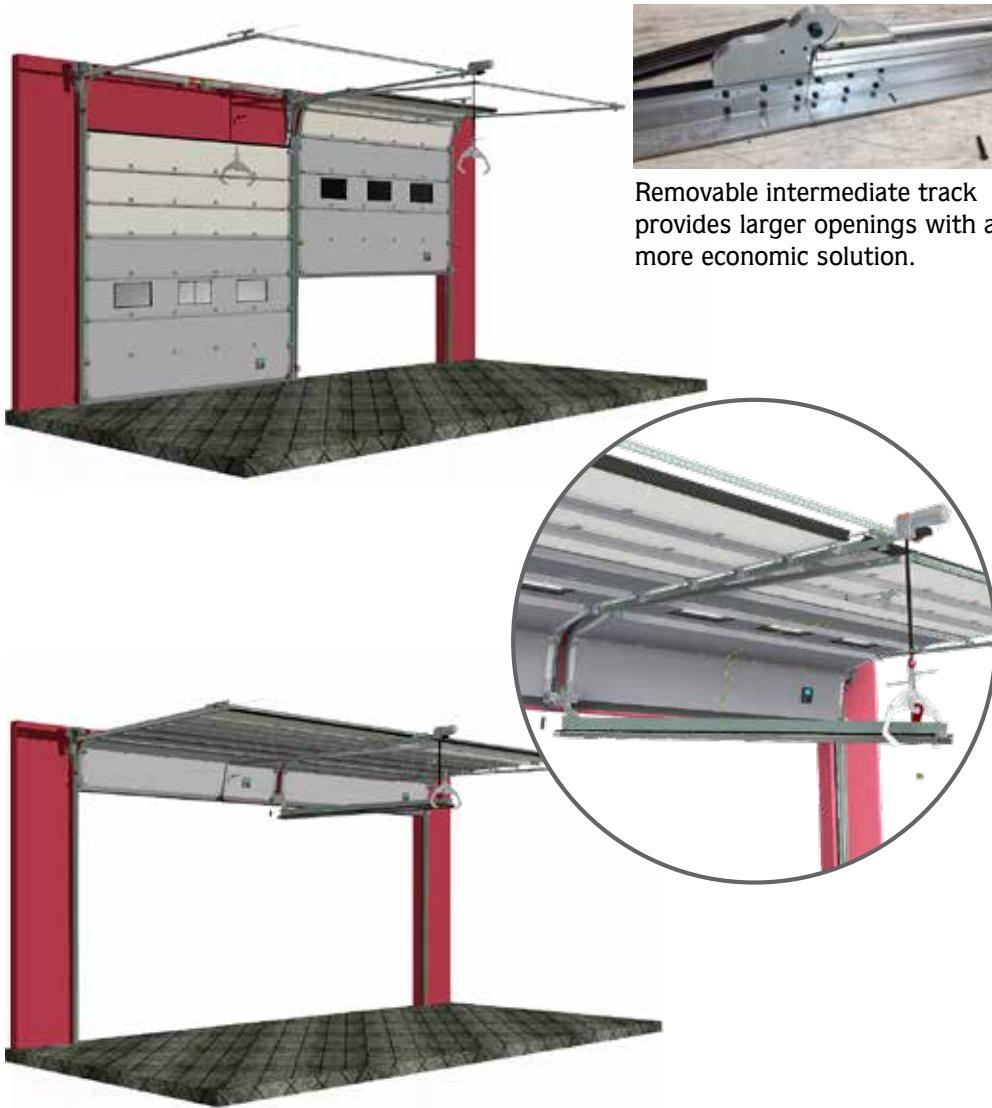


Removable intermediate track provides larger openings with a more economic solution.

Profiles

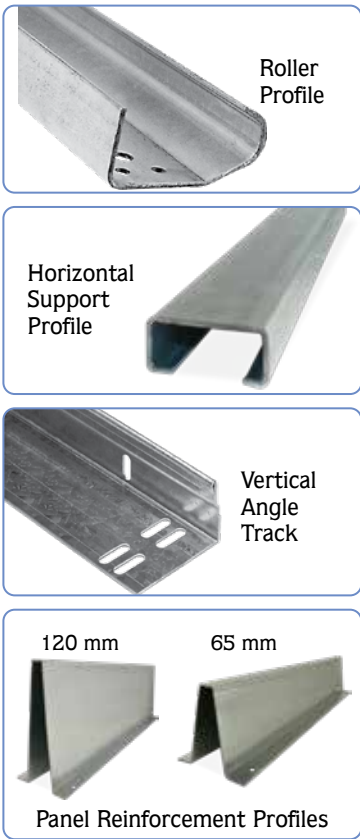

*All Rollers, Roller Tracks
and Vertical Angle
Profiles have 3" sizes in
Hero model doors*


Lifting Types

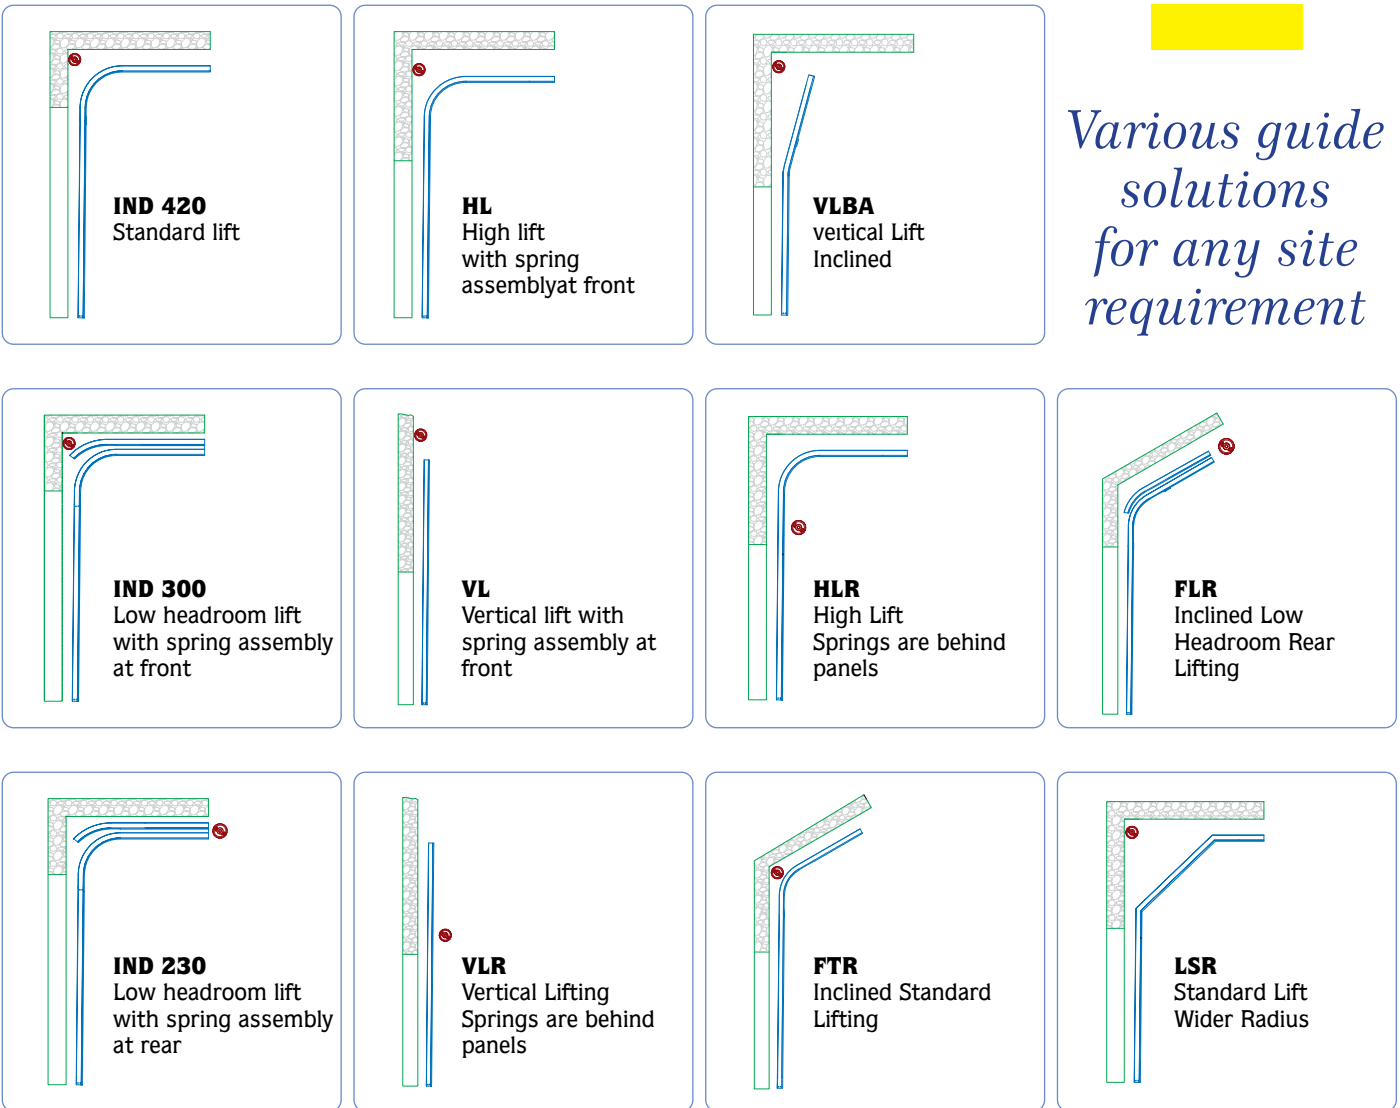




*business needs
power*

*various power sources
that perfectly comply with your needs*

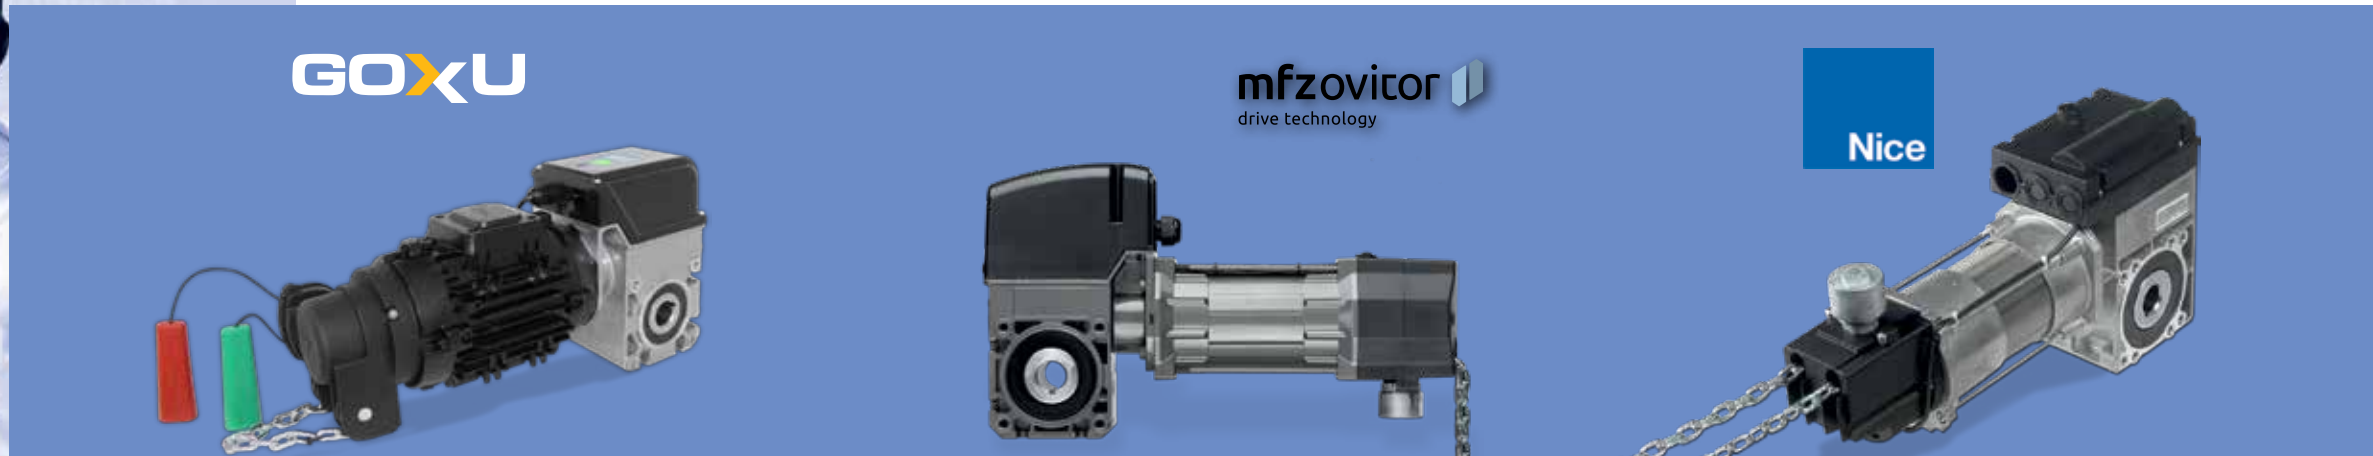

System Principle

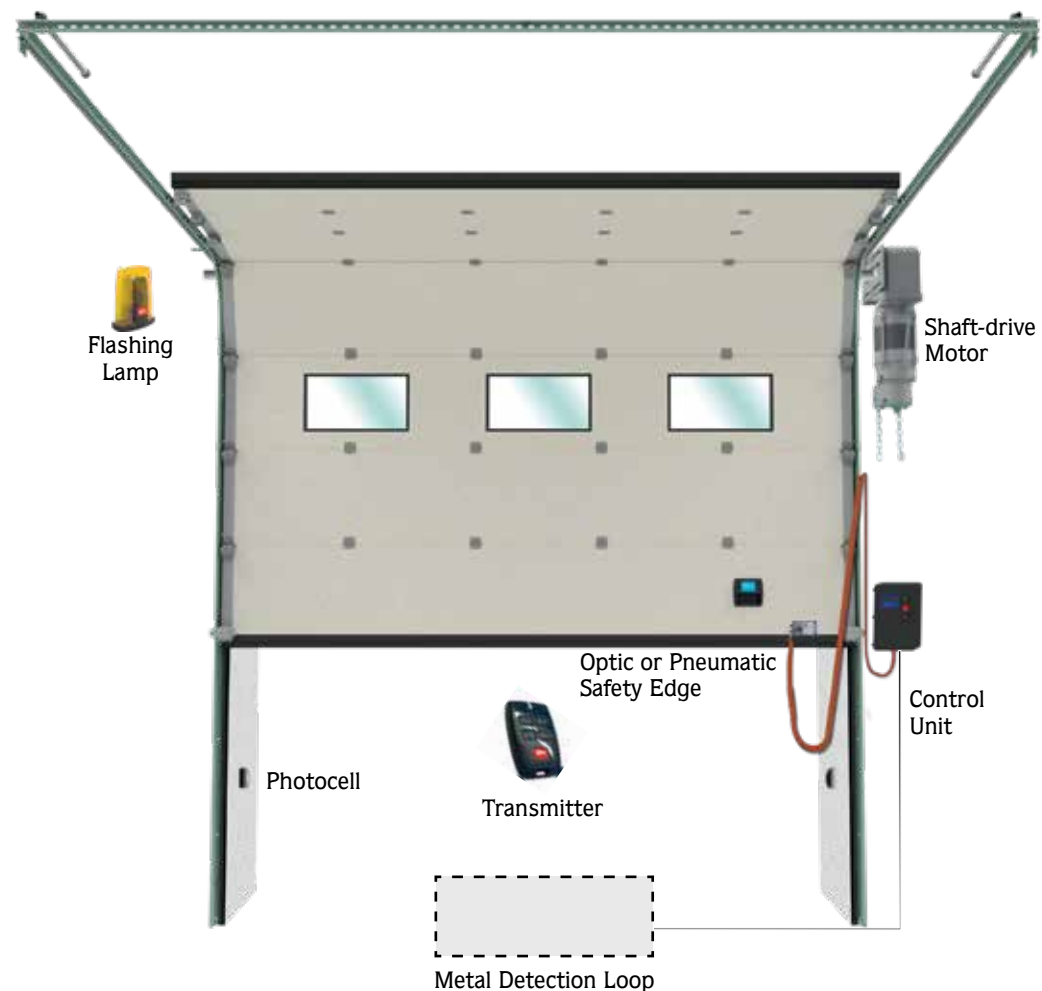

Control Units



Accessories



GOXU

— World Wide Open —

Experience,
Manufacturing,
Quality...

Made in

Türkiye

1987

Continual Customer Satisfaction

Continual Quality



For information



www.goxu.com.tr

BRS003-EN_REV09